


PRODUCT DATA SHEET

ISO-ACOUSTIC INSULATING STRIPS

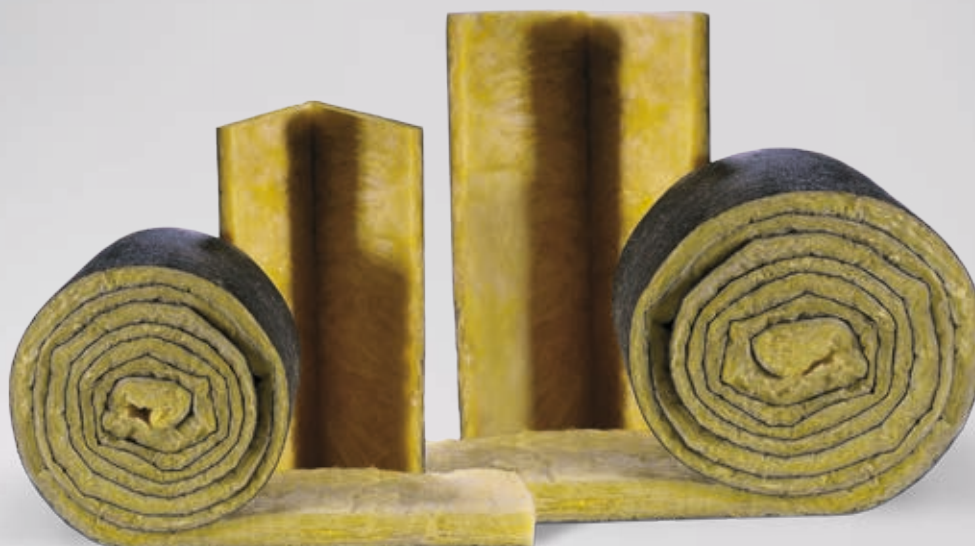

PRODUCT DESCRIPTION

ISO-ACOUSTIC INSULATING STRIPS are mineral wool felt sheets with fleece lamination on one side with excellent sound and heat insulating properties. They are used with trapezoidal sheeting and metal constructions as a sound insulation medium in connection with special trapezoidal profiles.

ISO-ACOUSTIC INSULATION STRIPS are available as either rolls or sheets with V-Cut for an optimal fit and easy installation.

APPLICATION

ISO-ACOUSTIC INSULATING STRIPS absorb surrounding noises that develop within buildings creating a comfortable sound environment. They decrease echoes and reduce the noise pollution. ISO-ACOUSTIC INSULATING STRIPS are fitted in the perforated ribs of special ceiling acoustic metal sheeting. The laminated fleecing gives protection against fraying and reduces the release of dust into the environment.

PRODUCT ADVANTAGES

- excellent sound insulation
- non-flammable (building material class A2)
- high material efficiency through optimal fitting
- V-Cut for easy fitting and handling
- fleece laminated to protect against fraying



ISO-ACOUSTIC INSULATING STRIPS

| Technical data | Standard | Classification |
|---|----------------|--|
| Material description | | mineral wool felt |
| Colour | | yellow / green |
| Acoustical absorption degree α (insulation thickness 20 mm) frequency: | DIN EN 20345 | |
| 125 Hz | | 0.09 |
| 205 Hz | | 0.20 |
| 500 Hz | | 0.46 |
| 1000 Hz | | 0.65 |
| 2000 Hz | | 0.77 |
| 4000 Hz | | 0.87 |
| Thermal conductivity | DIN 4108 | $\lambda_{10, tr} \leq 0.037 \text{ W/m} \cdot \text{K}$ |
| Fire behaviour | DIN 4102 | non-flammable A2 |
| Water vapour diffusion resistance μ | DIN EN 1931 | ≈ 1 |
| Dimension tolerance | DIN 7715 TP P3 | requirements fulfilled |
| Shelf life | | 2 years, dry and in original packing |
| Storage temperature | | +1 °C to +20 °C |

FINISHES

- rolls and sheets with fleece lamination on one side
- sheets with additional V-Cut available

DIMENSIONS

thickness: 20 and 30 mm

SERVICE


- individual dimensions available on request
- competent commercial and technical advice

PACKAGING

rolls, sheets with V-Cuts



ISO-ACOUSTIC INSULATING STRIPS in sheets with V-Cut for optimal fitting

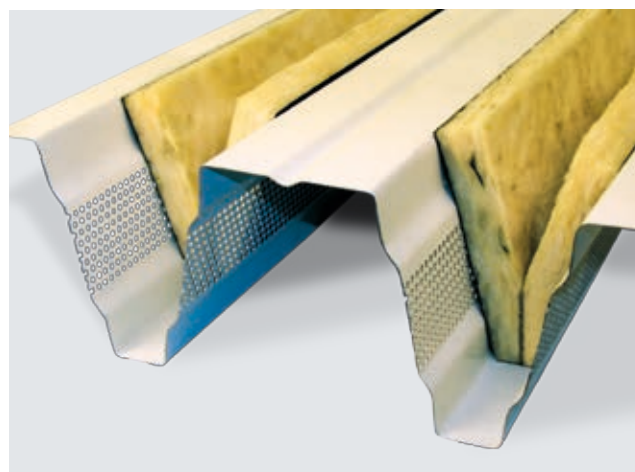

Installation example for ceiling constructions with perforated acoustic ribs for sound absorption